



Texas Instruments TI-30X IIS battery Replacement

Written By: rocky adams





Step 1 — the screws




- make sure to use a small Phillips

Step 2 — taking the back off

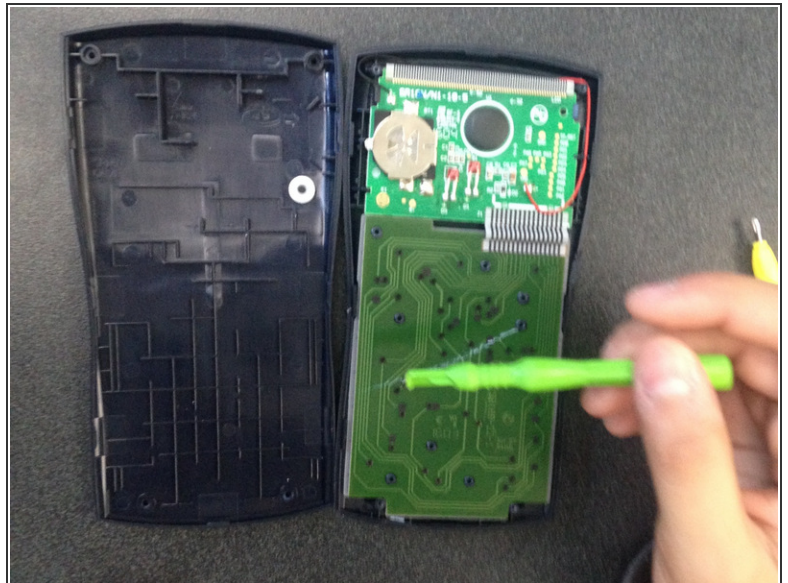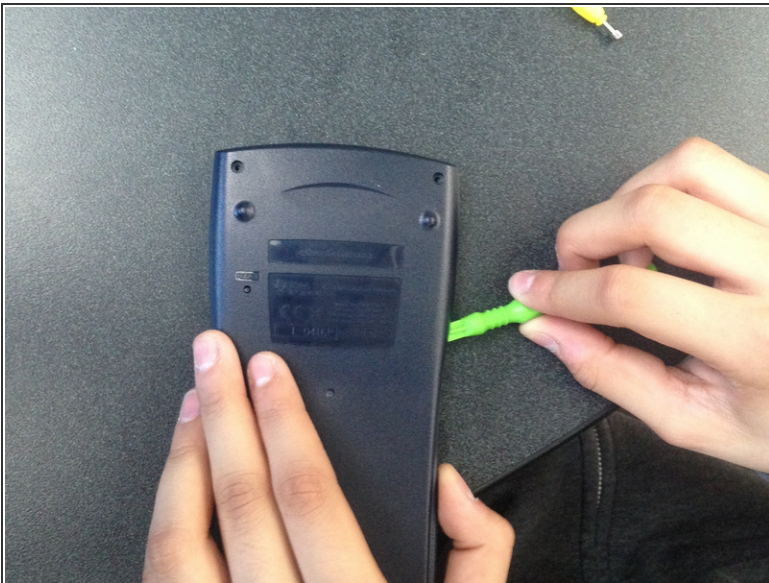

- use a wedge to carefully open it

Step 3

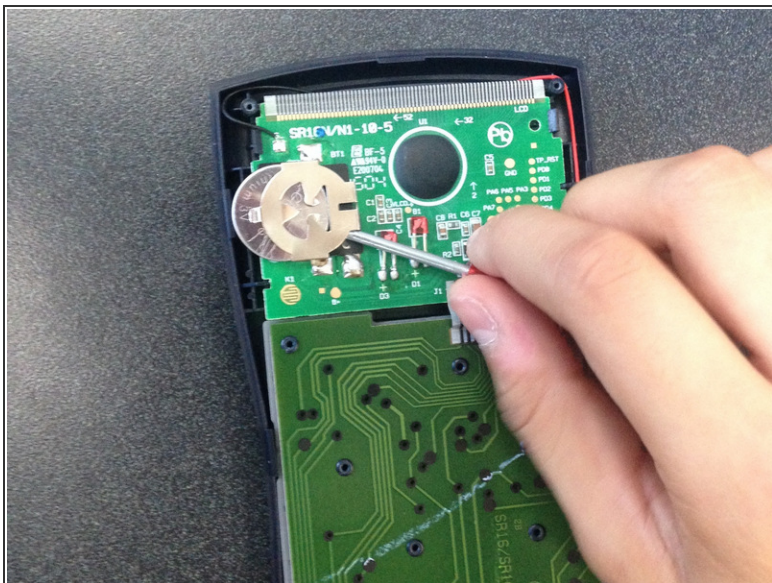

- now take out the battery after lifting up the small guard (if needed use something small but easy to hold to push it out)

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 06:38:20 PM.